

# SUBWOOFERS

## SUB 10


Technical Sheet



### SPECIFICATIONS

Nominal power	250W RMS
Maximum power	500W
Sensitivity	85dB
Nom. impedance	4 Ω
Cone	Polypropylene
Surround	Butyl
VC diameter	50mm 2"
Net weight	4.5kg

### FREQUENCY RESPONSE/IMPEDANCE

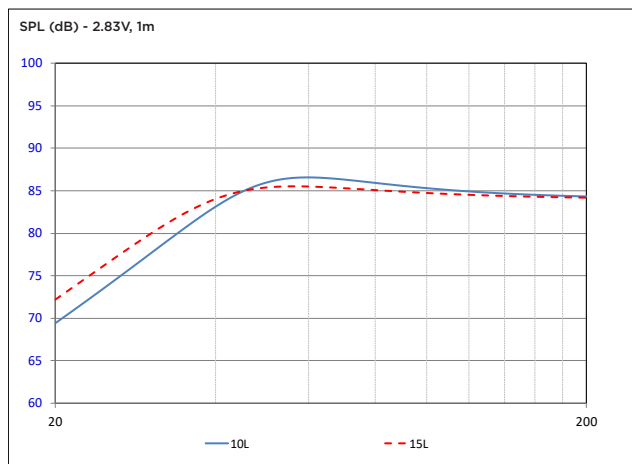

### PARAMETERS

Rdc	3.3 Ω
Fs	21Hz
Mms	180g
Cms	0.33mm/N
Vas	45L
Qts	0.526
Qes	0.569
Qms	6.88
Bxl	11.6 N/A
Sd	314cm <sup>2</sup>

### MECHANICAL DRAWING

